

SUBMITTAL DATA SHEET



**ECHELON™ SINGLE PACKAGE AIR CONDITIONER
GAS/ELECTRIC (14 SEER, R-410A) 2 - 5 TON
MODELS: D_YY024 thru 060**

JOB NAME:		LOCATION:		
PURCHASER:		ORDER NO:		
ENGINEER:				
SUBMITTED TO:	FOR:	REF:	APPROVAL:	CONSTRUCTION:
SUBMITTED BY:		DATE:		
UNIT DESIGNATION:		SCHEDULE NO.	MODEL NO.	

COOLING PERFORMANCE

TOTAL CAPACITY (NET) ----- _____ MBH
 SENSIBLE CAPACITY (NET) ----- _____ MBH
 OUTDOOR DESIGN TMP. _____ °F DB/WB
 TOTAL SUPPLY AIR ----- _____ CFM
 TEMP. OF AIR ENTERING
 EVAPORATOR COIL ----- _____ °F DB/WB
 POWER INPUT REQ. ----- _____ KW
 (LESS BLOWER MOTOR)

HEATING PERFORMANCE

GAS FIRED HEAT EXCHANGER
 INPUT/OUTPUT CAPACITY -- _____ / _____ MBH

SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR ----- _____ CFM
 TOTAL RESISTANCE EXTERNAL
 TO UNIT ----- _____ IWG
 BLOWER SPEED (Circle)----- HI MED LOW
 MOTOR RATING ----- _____ HP
 POWER INPUT REQ. ----- _____ WATT

ELECTRICAL DATA

POWER SUPPLY ----- _____ / _____ / _____
 TOTAL UNIT AMPACITY ----- _____ AMPS
 MINIMUM WIRE SIZE ----- _____ AWG
 MAX. OVERCURRENT DEVICE
 ___ FUSES ___ CIRCUIT BREAKER - _____ AMPS

UNIT WEIGHT

TOTAL UNIT WEIGHT (operational) - _____ LBS

CLEARANCES

FRONT ----- 36"
 BACK ----- 0"
 LEFT SIDE (FILTER ACCESS) ----- 24"
 RIGHT SIDE ----- 12"
 BELOW UNIT¹ ----- 0"
 ABOVE UNIT² ----- 36"

- Units may be installed on combustible floors made from wood or Class A, B or C roof covering material.
- Units must be installed outdoors. Overhanging structures or shrubs should not obstruct condenser air discharge outlet

STANDARD FEATURES


- R-410A Refrigerant.
- Low and high pressure switches on all products.
- High efficient rifled tube with enhanced fin condenser and evaporator coils.
- Internal compressor protection (temperature and pressure).
- Standard cooling operation down to 45° F (Low ambient kit to 0° F available).
- Refrigerant system strainer.
- Single or two stage gas heat.
- Blow thru heat exchanger design with aluminized steel tubes.
- Induced draft "POST-PURGE" gas control logic.
- Reliable spark to pilot ignition.
- Ignition control provides a red LED for diagnostic error codes.
- Compact size cabinet with single footprint.
- Bottom and/or side electrical and gas utility connections.
- Top discharge condenser air design with flush mounted grille guard.
- Full perimeter, removable base rails with built in rigging and shipping provisions.
- Heavy gauge galvanized steel cabinet with a paint finish which has industry leading 1000 hour salt spray rating per ASTM-B117 federal test standards.
- Easily field convertible from side to bottom discharge. No other accessory needed.
- Attractive cabinet design with single piece "watershed" top cover and drip edge to extend cabinet life and deter water collection.
- Factory Installed, attractive protection condenser coil grille.
- Foil face insulation which does not emit fibers into air stream.
- Permanently lubricated condenser and evaporator motors.
- Slide out blower assembly with electronically commutated motors on all models.
- Non corrosive condensate pan internally sloped to meet strict requirements of ASHRAE 62-89 Indoor Air Quality standard.
- Ridged mounted, protected refrigerant access ports externally accessible.
- Both numbered and colored wires.
- All three phase models have built in filter rack with cleanable filters and 75 VA transformer with resettable circuit breaker.
- Warranties on all product applications:
 - 10 year single phase compressor warranty and 5 or 10* year limited warranty on parts.
 - * To qualify for the extended 10-year parts warranty, the unit must be registered online at www.upgproductregistration.com within 90 days of install.
 - 5 year 3 phase compressor warranty and 1 year limited warranty on parts.
 - 20 year gas heat exchanger warranty.

NOTE:

- A 1" clearance must be provided between any combustible material and the supply air duct work.
- The products of combustion must not be allowed to accumulate within a confined space and recirculate.
- Refer to the Technical Guide for unit specifications.
- Unit may be installed on combustible floors made from wood or class A, B or C roof covering material.
- Units must be installed outdoors. Overhanging structures or shrubs should not obstruct air discharge outlet.

DIMENSIONS - INCHES

UNIT SIZE	DIMENSION	
	"A"	"B"
024 THRU 036	33½	18¼
042 THRU 060	41½	23¾

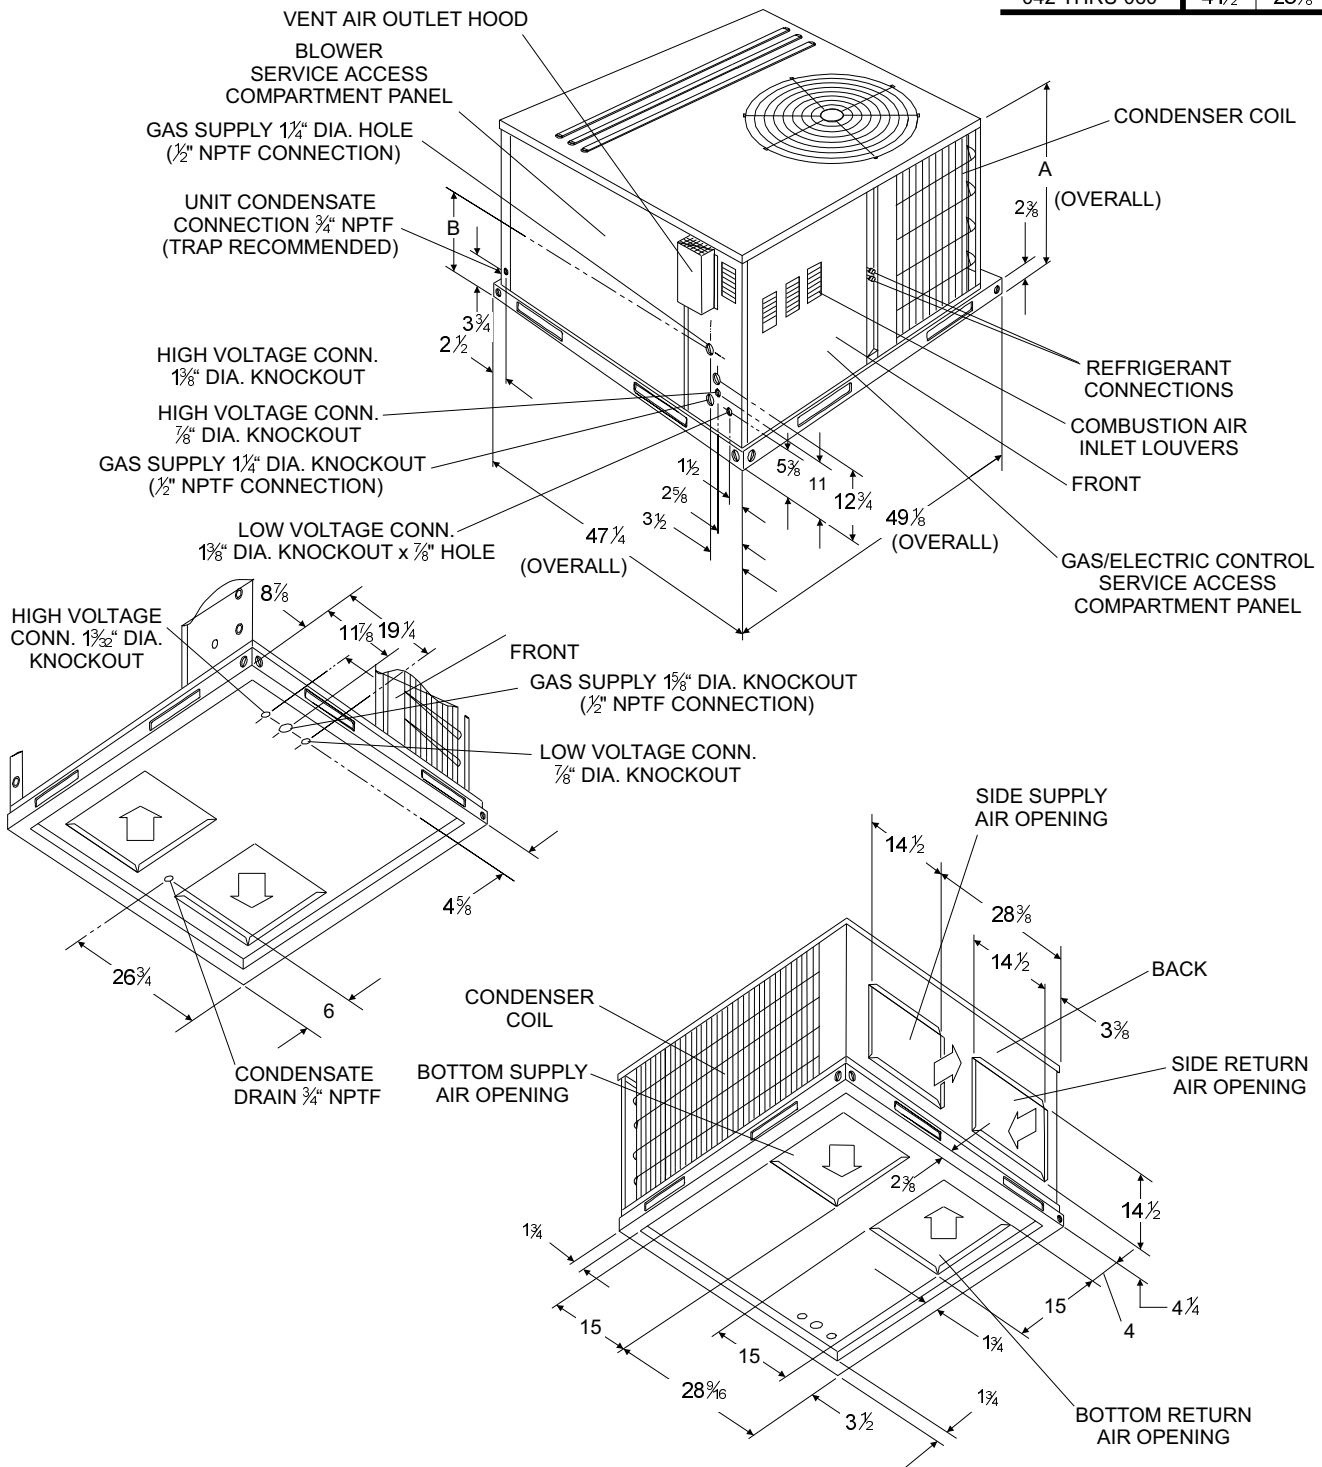

Subject to change without notice. Printed in U.S.A.
 Copyright © 2009 by Johnson Controls, Inc. All rights reserved.

289015-CSD-C-1009
 Supersedes: 289015-CSD-B-1108

Johnson Controls Unitary Products
 5005 York Drive
 Norman, OK 73069