

# SUBMITTAL DATA SHEET



**ECHELON™ SINGLE PACKAGE COOLING UNITS**  
**(15 SEER, R-410A) 2 - 4 TON**  
**MODELS: D\_PX024 THRU 048**

JOB NAME:		LOCATION:		
PURCHASER:		ORDER NO:		
ENGINEER:				
SUBMITTED TO:	FOR:	REF:	APPROVAL:	CONSTRUCTION:
SUBMITTED BY:			DATE:	
UNIT DESIGNATION:		SCHEDULE NO.	MODEL NO.	

### COOLING PERFORMANCE

TOTAL CAPACITY-----      MBH  
 SENSIBLE CAPACITY -----      MBH  
 OUTDOOR DESIGN TMP.      °F DB/WB  
 TOTAL SUPPLY AIR -----      CFM  
 TEMP. OF AIR ENTERING  
 EVAPORATOR COIL -----      °F DB/WB  
 POWER INPUT REQ. -----      KW  
 (LESS BLOWER MOTOR)

### HEATING PERFORMANCE

RESISTANCE HEAT -----      KW  
 CAPACITY-----      MBH  
 VOLTS -----     

### SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR -----      CFM  
 TOTAL RESISTANCE EXTERNAL  
 TO UNIT -----      IWG  
 BLOWER SPEED (Circle)----- HI MED LOW  
 MOTOR RATING -----      HP  
 POWER INPUT REQ. -----      WATT

### ELECTRICAL DATA

POWER SUPPLY -----      /      /       
 MINIMUM CIRCUIT AMPACITY ---      AMPS  
 MAX. OVERCURRENT DEVICE  
     FUSES      CIRCUIT BREAKER -      AMPS

### TOTAL UNIT WEIGHT

TOTAL UNIT WEIGHT (operational) -      LBS


### STANDARD FEATURES

- R-410A Refrigerant.
- Compact single size cabinet and footprint.
- Bottom and or side electrical utility connections.
- Top discharge condenser air design with flush mounted grille guard.
- Full perimeter, removable base rails with built in rigging and shipping provisions.
- Heavy gauge galvanized steel cabinet with a paint finish which has industry leading 1000 hour salt spray rating per ASTM-B117 federal test standards.
- Easily field convertible from side to bottom discharge. No other accessory needed.
- Attractive cabinet design with single piece "Water-Shed" top cover and drip edge to deter water collection and longer life.
- Factory installed, attractive protection condenser coil grille.
- High efficient rifled tube with enhanced fin condenser and evaporator coils.
- Foil face insulation which does not emit fibers into airstream.
- Permanently lubricated condenser and evaporator motors.
- ECM direct drive motor and slide out blower assembly.
- Non corrosive condensate pan internally sloped to meet strict requirements of ASHRAE 62-89 Indoor Air Quality standard.
- Internal compressor protection (temperature and pressure).
- Standard cooling operation down to 45° F (Low ambient kit to 0°F available).
- Refrigerant system strainer.
- Ridged mounted, protected refrigerant access ports externally accessible.
- Both numbered and colored wires.
- All three phase models have built in filter rack with cleanable filters and 75 VA transformer with re-settable circuit breaker.
- Warranties on all product applications:
  - 10 year single phase compressor warranty and 5 or 10\* year limited warranty on parts.
    - \* To qualify for the extended 10-year parts warranty, the unit must be registered online at [www.upgproductregistration.com](http://www.upgproductregistration.com) within 90 days of install.
  - 5 year 3 phase compressor warranty and 1 year limited warranty on parts.
  - 5 year electric heat element warranty.

### NOTE:

- A 1" clearance must be provided between any combustible material and the supply air ductwork.
- Refer to technical guide for unit specifications.
- Unit may be installed on combustible floors made from wood or class A, B or C roof covering material.
- Units must be installed outdoors. Overhanging structures or shrubs should not obstruct air discharge outlet.

## DIMENSIONS - INCHES

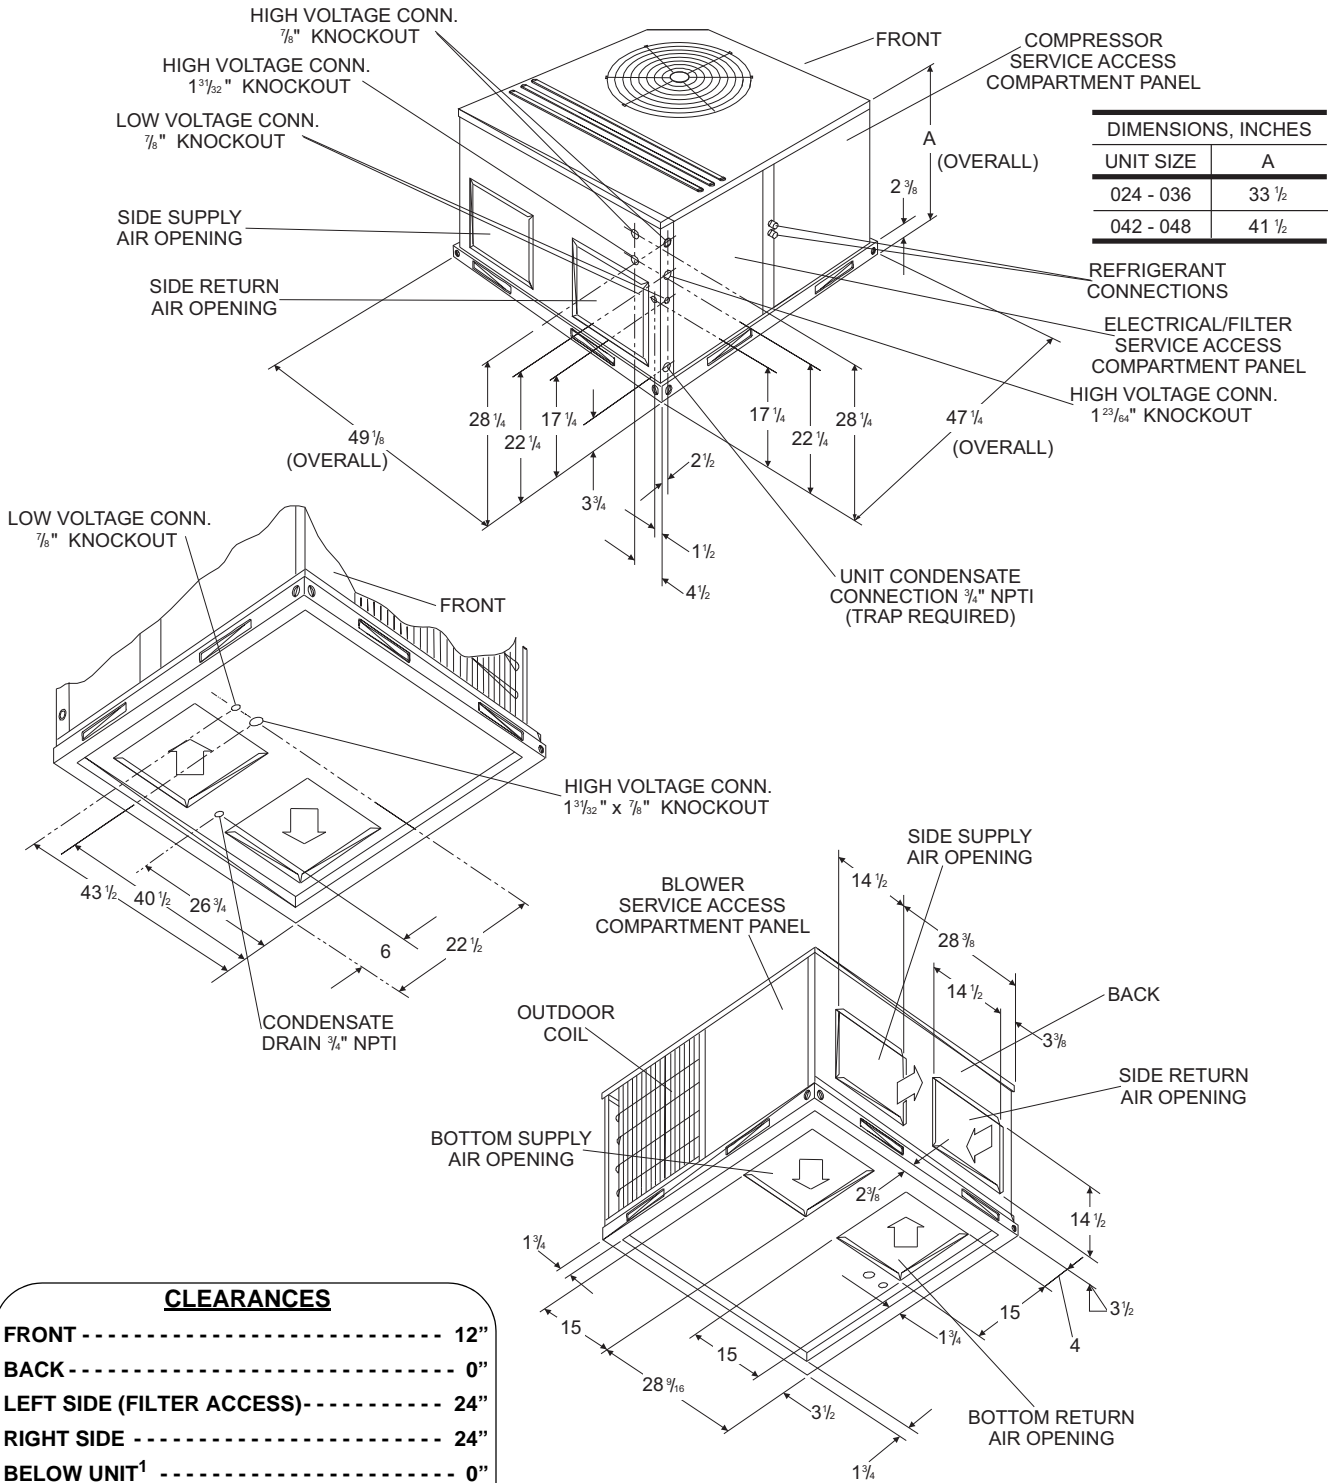

### CLEARANCES

FRONT	12"
BACK	0"
LEFT SIDE (FILTER ACCESS)	24"
RIGHT SIDE	24"
BELOW UNIT <sup>1</sup>	0"
ABOVE UNIT <sup>2</sup>	36"

1. Units may be installed on combustible floors made from wood or class A, B or C roof covering material.
2. Units must be installed outdoors. Overhanging structures or shrubs should not obstruct outdoor air discharge outlet.

Subject to change without notice. Printed in U.S.A.  
 Copyright © 2009 by Johnson Controls, Inc. All rights reserved.

295233-CSD-C-1009  
 Supersedes: 295233-CSD-B-0408

**Johnson Controls Unitary Products**  
 5005 York Drive  
 Norman, OK 73069